




G25WDO-3A-T4F

DOOSAN®

Model	G25WDO-3A-T4F		
PRIME POWER RATING	AMPS	KW	KVA
@ 480V-3Ø, 0.8PF, 60Hz	30	20	25
@ 240V-3Ø, 0.8PF, 60Hz	60	20	25
@ 208V-3Ø, 0.8PF, 60Hz	61	17	22
@ 240V-1Ø, 1.0PF, 60Hz	69	16.5	16.5
@ 120V-1Ø, 1.0PF, 60Hz	69 × 2	16.5	16.5
@ 400V-3Ø, 0.8PF, 50Hz	29	16	20
Voltage Configuration	3-Position Switch		
Frequency Capability	50Hz/60Hz Switchable		
ENGINE			
Engine Make / Model	Doosan D18		
Displacement (L)	1.794		
Number of Cylinders	3		
Power Output @ 1800RPM - HP (kWm)	33.5 (25)		
Emissions Tier Level	Tier 4 Final		
Aftertreatment Technology	DOC		
Usable Fuel Tank Capacity - Gal (L)	46.7 (177)		
Diesel Exhaust Fluid (DEF) Capacity - Gal (L)	N/A		
Runtime @ 100% Load - Hr	25.9		
DIMENSIONS WITH RUNNING GEAR			
Length - in (mm)	130.5 (3315)		
Width - in (mm)	72.8 (1850)		
Height - in (mm)	76.6 (1946)		
Weight (Ready to Run) - lb (kg)	3140 (1424)		
Sound Level @ 23 ft (7m) and 100%	63		

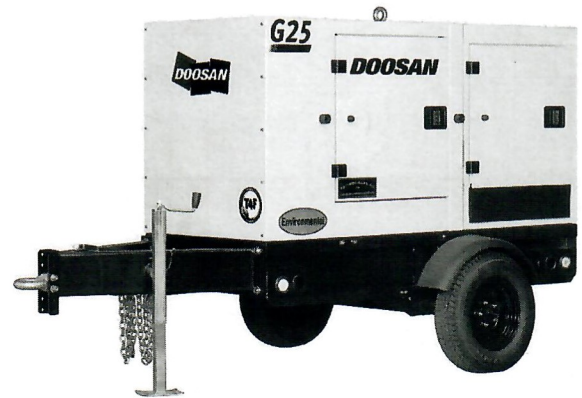

AUTHORIZED DEALER



FOR SALES & SERVICE

1-800-287-1538 • tdmgo.com

DoosanPortablePower.com | 800.633.5206

© 2018 Doosan Portable Power. All rights reserved.

Doosan reserves the right to limit quantities, alter lead times or cancel models without prior notice or obligation. Nothing contained in this brochure intended to extend any warranty or representation, expressed or implied, regarding the product described herein. Any such warranties or other terms and conditions of sale shall be in accordance with standard Doosan Portable Power terms and conditions of sale for such products, which are available upon request. Specifications in this brochure are subject to change without notice.